
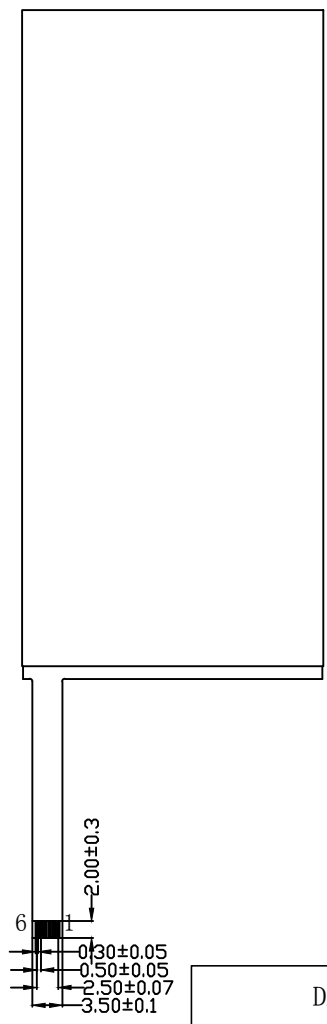
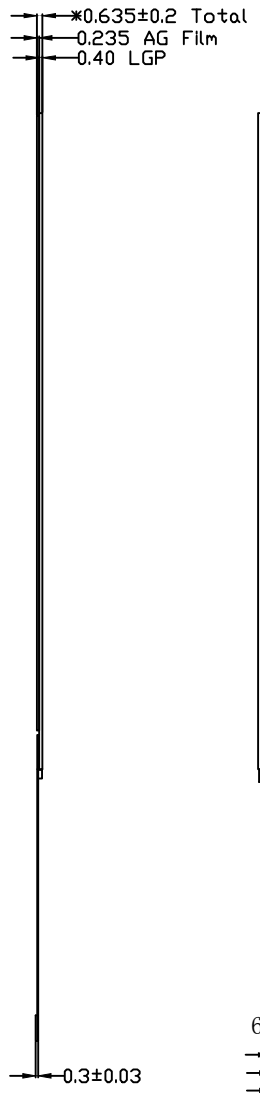



Front View

Side View

Back View

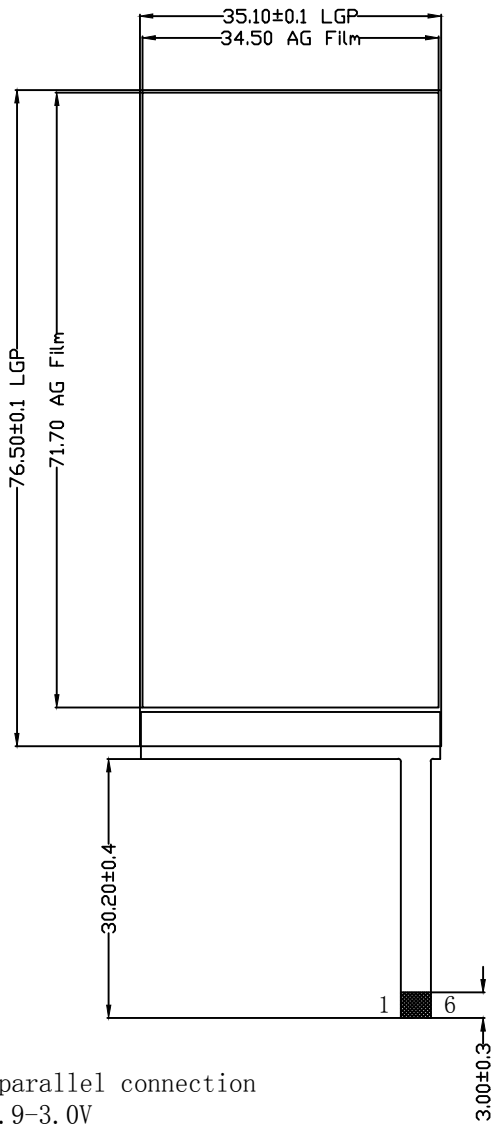

LED CIRCUIT DIAGRAM
(LED 1*4=4 DIES)



$V_f = 2.75V \text{ min } 2.9V \text{ typ } 3.0V \text{ max}$
 $I_f = 60mA$

Technical Parameter:

1. AG+FILM
2. Front light 4PCS LED parallel connection
3. Front light Voltage: 2.9-3.0V
4. Surface hardness: $L \geq 6H$
5. Operating Environment: $0^\circ C \sim +50^\circ C, \leq 90\%RH$
6. Storage Environment: $-25^\circ C \sim +70^\circ C, \leq 90\%RH$
7. Unmarked Dimensional Tolerances: $\pm 0.2mm$

FL Pin define

1pin	A
2pin	A
3pin	NC
4pin	NC
5pin	K
6pin	K

DALIAN GOOD DISPLAY CO., LTD.

DRAWN BY:	PRODUCT MODEL: FL029-S03	VIEW:
CHECKED BY:	CUSTOMER ID:	
APPROVED BY:	DATE: 2023-05-04	UNITS mm
Standard tolerance:	WEBSITE: www.good-display.com	SCALE 1:1